

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
11 October 2001 (11.10.2001)

PCT

(10) International Publication Number  
WO 01/76088 A2

- (51) International Patent Classification<sup>7</sup>: H04B 1/707
- (21) International Application Number: PCT/US01/10464
- (22) International Filing Date: 30 March 2001 (30.03.2001)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
09/540,922 31 March 2000 (31.03.2000) US
- (71) Applicant: QUALCOMM INCORPORATED [US/US];  
5775 Morehouse Drive, San Diego, CA 92121-1714 (US).
- (72) Inventor: BAYLEY, Gwain; 8016 Paseo Aliso, Carlsbad,  
CA 92009 (US).
- (74) Agents: WADSWORTH, Philip, R. et al.; Qualcomm In-  
corporated, 5775 Morehouse Drive, San Diego, CA 92121-  
1714 (US).


- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:

— without international search report and to be republished upon receipt of that report

[Continued on next page]

(54) Title: DYNAMIC ADJUSTMENT OF SEARCH WINDOW SIZE IN RESPONSE TO SIGNAL STRENGTH

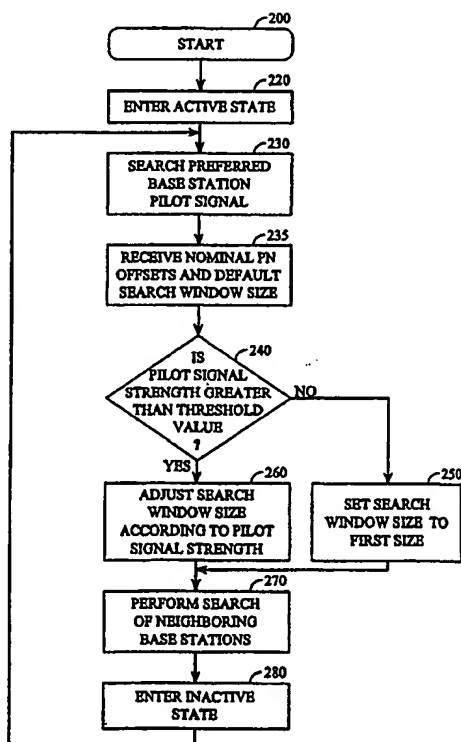

(57) Abstract: A method and apparatus of adjusting a search window size by a remote unit in a slotted mode wireless communication system. In a slotted mode communication system, the remote unit is in an "active state" during its assigned slot. While in the active state the controller in a remote unit passes selected sets of search parameters to a search engine. The search engine performs searches on base stations using the selected sets of search parameters. One search parameter, the search window size, is adjusted in response to a measured signal strength of a first base station signal. The adjusted search window size is used by the remote unit when searching other base stations.

WO 01/76088 A2

## DYNAMIC ADJUSTMENT OF SEARCH WINDOW SIZE IN RESPONSE TO SIGNAL STRENGTH

### 5 I. Field of the Invention

The invention relates to wireless communications systems. In particular, the invention relates to dynamic adjustment of search window size used by a remote unit to search base stations, in response to a signal strength of a preferred base station, in a wireless communication system.

10

### II. Background of the Invention

A wireless communication system may comprise multiple remote units and multiple base stations. Figure 1 exemplifies an embodiment of a terrestrial wireless communication system with three remote units 10A, 10B and 10C and two base stations 12. In Figure 1, the three remote units are shown as a mobile telephone unit installed in a car 10A, a portable computer remote 10B, and a fixed location unit 10C such as might be found in a wireless local loop or meter reading system. Remote units may be any type of communication unit such as, for example, handheld personal communication system units, portable data units such as a personal data assistant, or fixed location data units such as meter reading equipment. Figure 1 shows a forward link 14 from the base station 12 to the remote units 10 and a reverse link 16 from the remote units 10 to the base stations 12.

Communication between remote units and base stations, over the wireless channel, can be accomplished using one of a variety of multiple access techniques which facilitate a large number of users in a limited frequency spectrum. These multiple access techniques include time division multiple access (TDMA), frequency division multiple access (FDMA), and code division multiple access (CDMA). An industry standard for CDMA is set forth in the TIA/EIA Interim Standard entitled "Mobile Station - Base Station Compatibility Standard for Dual-Mode Wideband Spread Spectrum Cellular System", TIA/EIA/IS-95, and its progeny (collectively referred to here as IS-95), the contents of which are incorporated by reference herein in their entirety. Additional information concerning

30

a CDMA communication system is disclosed in U.S. Patent No. 4,901,307, entitled SPREAD SPECTRUM MULTIPLE ACCESS COMMUNICATION SYSTEM USING SATELLITE OR TERRESTRIAL REPEATERS, (the '307 patent) assigned to the assignee of the present invention and incorporated in its entirety herein by reference.

In the '307 patent, a multiple access technique is disclosed where a large number of mobile telephone system users, each having a transceiver, communicate through base stations using CDMA spread spectrum communication signals. The CDMA modulation techniques disclosed in the '307 patent offer many advantages over other modulation techniques used in wireless communication systems such as TDMA and FDMA. For example, CDMA permits the frequency spectrum to be reused multiple times, thereby permitting an increase in system user capacity. Additionally, use of CDMA techniques permits the special problems of the terrestrial channel to be overcome by mitigation of the adverse effects of multipath, e.g. fading, while also exploiting the advantages thereof.

In a wireless communication system, a signal may travel several distinct propagation paths as it propagates between base stations and remote units. The multipath signal generated by the characteristics of the wireless channel presents a challenge to the communication system. One characteristic of a multipath channel is the time spread introduced in a signal that is transmitted through the channel. For example, if an ideal impulse is transmitted over a multipath channel, the received signal appears as a stream of pulses. Another characteristic of the multipath channel is that each path through the channel may cause a different attenuation factor. For example, if an ideal impulse is transmitted over a multipath channel, each pulse of the received stream of pulses generally has a different signal strength than other received pulses. Yet another characteristic of the multipath channel is that each path through the channel may cause a different phase on the signal. For example, if an ideal impulse is transmitted over a multipath channel, each pulse of the received stream of pulses generally has a different phase than other received pulses.

In the wireless channel, the multipath is created by reflection of the signal from obstacles in the environment such as, for example, buildings, trees, cars, and people. Accordingly, the wireless channel is generally a time varying multipath

channel due to the relative motion of the structures that create the multipath. For example, if an ideal impulse is transmitted over the time varying multipath channel, the received stream of pulses changes in time delay, attenuation, and phase as a function of the time that the ideal impulse is transmitted.

5 The multipath characteristics of a channel can affect the signal received by the remote unit and result in, among other things, fading of the signal. Fading is the result of the phasing characteristics of the multipath channel. A fade occurs when multipath vectors add destructively, yielding a received signal that is smaller in amplitude than either individual vector. For example if a sine wave is transmitted  
10 through a multipath channel having two paths where the first path has an attenuation factor of  $X$  dB, a time delay of  $\delta$  with a phase shift of  $\Theta$  radians, and the second path has an attenuation factor of  $X$  dB, a time delay of  $\delta$  with a phase shift of  $\Theta + \pi$  radians, no signal is received at the output of the channel because the two signals, being equal amplitude and opposite phase, cancel each other. Thus, fading may have  
15 a severe negative effect on the performance of a wireless communication system.

A CDMA communication system is optimized for operation in a multipath environment. For example, the forward link and reverse link signals are modulated with a high frequency pseudonoise (PN) sequence. The PN modulation allows the many different multipath instances of the same signal to be separately received  
20 through the use of a "rake" receiver design. In a rake receiver, each element within a set of demodulation elements can be assigned to an individual multipath instance of a signal. The demodulated outputs of the demodulation elements are then combined to generate a combined signal. Thus, all of the multipath signal instances must fade together before the combined signal experiences a deep fade.

25 In a communication system based on the industry standard for CDMA, IS-95, each of the multiple base stations transmits a pilot signal having a common PN sequence. Each base station transmits the pilot signal offset in time from neighboring base stations so that the signals can be distinguished from one another at the remote unit. At any given time, the remote unit may receive a variety of pilot  
30 signals from multiple base stations. Using a copy of the PN sequence produced by a local PN generator, the entire PN space can be searched by the remote unit. Using

the search results, the controller distinguishes pilot signals from multiple base stations based on the time offset.

In the remote unit, a controller is used to assign demodulation elements to the available multipath signal instances. A search engine is used to provide data to the controller concerning the multipath components of the received signal. The search engine measures the arrival time and amplitude of the multipath components of a pilot signal transmitted by the base stations. The effect of the multipath environment on the pilot signal and the data signal transmitted by a common base station is very similar because the signals travel through the same channel at the same time. Therefore, determining the multipath environment's affect on the pilot signal allows the controller to assign demodulation elements to the data channel multipath signal instances.

The search engine determines the multipath components of the pilot signals of base stations in the proximity of the remote unit by searching through a sequence of potential PN offsets and measuring the energy of the pilot signal received at each of the potential PN offsets. The controller evaluates the energy associated with a potential offset, and, if it exceeds a threshold, assigns a signal demodulation element to that offset. A method and apparatus of demodulation element assignment based on searcher energy levels is disclosed in U.S. Patent No. 5,490,165 entitled DEMODULATION ELEMENT ASSIGNMENT IN A SYSTEM CAPABLE OF RECEIVING MULTIPLE SIGNALS, (the '165 patent) assigned to the assignee of the present invention.

Figure 2 shows an exemplifying set of multipath signal instances of a single pilot signal from a base station arriving at a remote unit. The vertical axis represents the power received in decibels (dB). The horizontal axis represents the delay in the arrival time of a signal instance due to multipath delays. The axis (not shown) going into the page represents a segment of time. Each signal spike in the common plane of the page has arrived at the remote unit at a common time but has been transmitted by the base station at a different time. Each signal spike 22-27 has traveled a different path and therefore exhibits a different time delay, a different amplitude, and a different phase response. The six different signal spikes represented by spikes 22-27 are representative of a severe multipath environment. A typical urban

environment produces fewer usable paths. The noise floor of the system is represented by the peaks and dips having lower energy levels. The task of the search engine is to identify the delay, as measured by the horizontal axis, and amplitude, as measured by the vertical axis, of signal spikes 22- 27 for potential demodulation element assignment.

Note, as shown in Figure 2, each of the multipath peaks varies in amplitude as a function of time as shown by the uneven ridge of each multipath peak. In the limited time shown, there are no major changes in the multipath peaks. Over a more extended time range, multipath peaks disappear and new paths are created as time progresses. Multipath peaks are likely to merge together or blur into a wide peak over time.

Typically, the operation of the search engine is overseen by a controller. The controller commands the search engine to step through a set of PN offsets, referred to as a search window, that is likely to contain one or more multipath signal peaks suitable for assignment to a demodulation element. For each offset, the search engine reports the energy it found offset back to the controller. Demodulation elements may then be assigned by the controller to the paths identified by the search engine (i.e. the timing reference of their PN generators is aligned with the timing of the identified path). Once a demodulation element has locked onto the signal, it then tracks that path on its own without controller supervision, until the path fades away or until the demodulation element is assigned to another path by the controller.

As noted above, each base station in a given geographical area is assigned a sequence offset of a common PN pilot sequence. For example, according to IS-95, a PN sequence having  $2^{15}$  chips (i.e., one bit in the PN sequence) and repeating every 26.66 milliseconds (ms) is transmitted by each base station in the system at one of 512 PN sequence offsets as a pilot signal. According to IS-95 operation, the base stations continually transmit the pilot signal which can be used by the remote unit to identify the base station as well as other functions, such as for example, determining the multipath environment the remote unit is operating in and synchronization of remote unit timing to the base station timing.

During initial power on, or any other situation when the remote unit has lost a pilot signal such as when performing a hard hand-off to a different operating

frequency, the remote unit evaluates all possible PN offsets of the pilot PN sequence. Typically, a search engine measures the pilot signal strength at all possible PN offsets, proceeding at a measurement rate that produces an accurate measure of the pilot signal present at the corresponding offset. Proceeding in this manner, the search engine determines the PN offset of base stations which are geographically near the remote unit. Searching each PN offset in this manner can take anywhere from hundreds of milliseconds to a few seconds depending on the channel conditions during acquisition. This amount of time for the remote unit to reacquire a pilot signal is detrimental to the remote unit operation, and may be annoying to the user of the remote unit.

Figure 3 shows an extended portion of PN space on the horizontal axis. The groups of peaks 30, 32 and 34 represent transmissions from three different base stations. As shown, the signal from each base station signal experiences a different multipath environment. Also, each base station has a different PN offset from the PN reference 36. Thus, the controller may select a set of PN offsets corresponding to search windows for any of the identified base stations. This allows the remote unit to simultaneously demodulate signals from multiple base stations by assigning demodulation elements appropriately.

In a typical CDMA communication system, remote units sporadically establishes bi-directional communications with a base station. For example, a cellular telephone remains idle for significant periods of time when no call is in process. However, to ensure that any message directed to a remote unit is received, the remote unit continuously monitors the communication channel even while it is idle. For example, while idle, the remote unit monitors the forward link channel from the base station to detect incoming calls. During such idle periods, the cellular telephone continues to consume power to sustain the elements necessary to monitor for signals from the base stations. Many remote units are portable and are powered by an internal battery. For example, personal communication system (PCS) handsets are almost exclusively battery-powered. The consumption of battery resources by the remote unit in idle mode decreases the battery resources available to the remote unit when a call is placed or received. Therefore, it is desirable to minimize power consumption in a remote unit in the idle state and thereby increase battery life.

One means of reducing remote unit power consumption in a communication system is disclosed in U.S. Patent No. 5,392,287, entitled APPARATUS AND METHOD FOR REDUCING POWER CONSUMPTION IN A MOBILE COMMUNICATION RECEIVER (the '287 patent), assigned to the assignee of the present invention and hereby incorporated in its entirety herein by reference. In the '287 patent, a technique for reducing power consumption in a remote unit operating in an idle mode (i.e. a remote unit which is not engaged in bi-directional communication with a base station) is disclosed. In idle, each remote unit periodically enters an "active" state during which it prepares to and receives messages on a forward link communication channel. In the time period between successive active states, the remote unit enters an "inactive" state. During the remote unit's inactive state, the base station does not send any messages to that remote unit, although it may send messages to other remote units in the system that are in the active state.

As disclosed in the '287 patent, a base station broadcast messages which are received by all remote units within the base station coverage area on a "paging channel." All idle remote units within the base station coverage area monitor the paging channel. The paging channel is divided in the time dimension into a continuous stream of "slots." Each remote unit operating in slotted mode monitors only specific slots which have been assigned to it as active (assigned) slots. The paging channel continually transmits messages in numbered slots, repeating the slot sequence, such as for example, every 640 slots. When a remote unit enters the coverage area of a base station, or if a remote unit is initially powered on, it communicates its presence to a preferred base station. Typically the preferred base station is the base station which has the strongest pilot signal as measured by the remote unit.

The preferred base station, along with a plurality of geographically near neighboring base stations, assign a slot, or a plurality of slots, within their respective paging channels, for the remote unit to monitor. The base station uses the slots in the paging channel to transmit control information to a remote unit, if necessary. The remote unit may also monitor a timing signal from the preferred base station allowing the remote unit to align, in the time dimension, to the base station slot



timing. By aligning in the time dimension to the preferred base station slot timing, the remote unit can determine when a paging channel slot sequence begins. Thus, knowing when the paging channel slot sequence begins, which slots are assigned for it to monitor, the total number of slots in the repetitive paging channel sequence of slots, and the period of each slot, the remote unit is able to determine when its assigned slots occur.

Generally, the remote unit is in the inactive state while the base station is transmitting on the paging channel in slots which are not within the remote unit's assigned set. While in the inactive state, the remote unit does not monitor timing signals transmitted by the base station, maintaining slot timing using an internal clock source. Additionally, while in the inactive state the remote unit may remove power from selected circuitry, such as, for example, circuits which monitor pilot signals transmitted by base stations to detect changes in the wireless channel including the search engine. Using its internal timing, the remote unit transits to its active state a short period of time before the next occurrence of an assigned slot.

When transiting to the active state, the remote unit applies power to circuitry that monitors the wireless channel, including the search engine. The search engine is used to reacquire the preferred base station's pilot signal and to detect changes in the wireless channel which may have occurred due to the movement of the remote unit or to the movement of objects within the coverage area of the base station. In addition to reacquiring the pilot signal, the remote unit may perform any other actions or initializations in preparation of receiving a message at the beginning of its assigned slot.

When the remote unit enters the active state, it may receive messages in its assigned slots in the paging channel and respond to commands from the base station. For example, the remote unit may be commanded to activate a "traffic" channel to establish a bi-directional communication link for conducting subsequent voice communication in response to an incoming call. If there is no message from the base station, or no command requesting the remote unit to remain active, at the end of the assigned slot the remote unit returns to the inactive state. In addition, the remote unit returns to the inactive state immediately if commanded to do so by the base station.

During its assigned slot, the remote unit's search engine measures the pilot signal strengths of the preferred base station as well as the pilot signal strength of neighboring base stations. If the remote unit relocates from the coverage area of one base station to another neighboring base station's coverage area, the remote unit needs to "hand-off" to the neighboring base station. A hand-off occurs when the transmitted pilot signal strength of a neighbor base station becomes sufficiently stronger than the preferred base station. When this occurs, the neighboring base station is assigned as the preferred base station. Following a hand-off, in the next active state, the remote unit monitors the paging channel of the new preferred base station to receive messages and commands.

In addition to providing data for determining when a hand-off should occur, searches of the preferred base station's pilot signal allow the remote unit to make adjustments to compensate for changes in the multipath environment. For example, if one of the multipath signal instances weakens to the point that it is unusable, the remote unit may reassign demodulation elements accordingly.

Knowing the nominal PN offset of the preferred base station as well as a neighboring set of base stations, typically, the controller passes a set of search parameters to the search engine specifying PN offsets at which multipath signal instances of pilot signals are likely to be found. At the completion of the search, the search engine passes the search results to the controller. The controller analyzes the search results and selects a set of search parameters for the next search. Following selection of the new search parameters, the controller passes the parameters to the search engine and the search process is repeated. This process is repeated until the remote unit once again enters the inactive idle state.

Due to the limited period available for searching, it is desirable to decrease the time required to complete a search of any individual base station's pilot signal. By decreasing the time required for an individual search, more searches may be performed in a given period. Increasing the number of base stations searched provides a more robust wireless communication system, improving the remote unit's ability to monitor the multipath environment and to better determine when a handoff should occur.

Therefore, there is a need in the art for a method and apparatus to decrease the time required to complete a search of base station signals.

#### Summary of the Invention

5           The invention addresses these and other needs by providing a system and method wherein a remote unit dynamically adjusts the portion of the PN space searched for signals of base stations. The remote unit adjusts the size of the portion of PN space searched in response to characteristics of a signal transmitted by a first base station and received by the remote unit.

10           In one aspect of the invention, the strength of a signal transmitted by a first base station is measured at the remote unit. Typically, an increase in the strength of the signal indicates that the remote unit is geographically nearer to the base station, and a decrease in signal strength indicates that the remote unit is geographically farther from the base station. The remote unit receives the signal transmitted by the  
15           base station and synchronizes its local timing to the earliest arriving multipath of that signal. All base stations are synchronized so that the PN offsets (e.g., delays) between signals transmitted by the various base stations remain aligned with respect to one another.       Thus, if the remote unit receives a strong signal from the first base station, there is a high probability the remote unit is geographically near the  
20           base station. In addition, because the remote unit timing is synchronized with the first base station, it is unlikely that energy from a second base station will be received earlier in time than the energy received from the first base station. Therefore, if the remote unit receives a strong signal from the first base station, a set of PN offsets, referred to as a search window, used to search for signals transmitted  
25           by a second base station, may be decreased in the direction ahead in time. In contrast, if the remote unit receives a weak signal from the first base station, there is a higher probability that the remote unit is geographically far from the base station, and there is a higher likelihood that energy from a second base station may be received nearer in time to the energy received from the first base station. Thus, a  
30           correspondingly larger search window, increased in the direction ahead in time, may be selected.

In another aspect, the search window size selected in response to the received signal strength may be used for a subset of the searches. A default search window size, selected by a base station and communicated to the remote unit, may be used for the remaining searches. For example, the search window size communicated to the remote unit may be used during 4 out of 5 searches of a particular base station. A decreased search window, selected by the remote unit, may be used during the remaining 1 out of 5 searches. It is contemplated that other combinations of searches using differing search window sizes may be performed by the remote unit.

In another aspect, the first base station is a preferred base station, and the second base station is a plurality of neighboring base stations. In addition, the signals transmitted by the base stations and measured by the remote unit are pilot signals.

In yet another aspect, the distance between the first base station and the remote unit is estimated based on, such as for example, the Global Positioning System (GPS) or other known positioning systems that provide information sufficient to determine the distance. The remote unit may use this distance information in the selection of a search window size.

#### Brief Description of the Drawings

The features, objects and advantages of the present invention will become more apparent from the detailed description set forth below when taken in conjunction with the drawings in which like reference characters identify correspondingly throughout, and wherein:

Figure 1 is a representative diagram showing a typical modern wireless communication system.

Figure 2 is a graph showing an exemplifying set of multiple signal instances of a pilot signal from a single base station arriving at a remote unit.

Figure 3 is a graph showing an exemplifying set of multiple signal instances of pilot signals from multiple base stations arriving at a remote unit.

Figure 4 is a representative diagram illustrating the transition from the inactive state to the active state at the assigned slot of a remote unit in a slotted mode communication system.

Figure 5 is a block diagram of an embodiment of a remote unit.

Figure 6 is a representative diagram illustrating two base station coverage areas and a remote unit.

Figure 7 is a graph showing exemplifying pilot signals from the two base stations illustrated in Figure 6 arriving at a remote unit.

5            Figure 7A is a graph showing an expanded view of the pilot signal of the second base station as received by the remote unit.

Figure 8 is a flow chart illustrating sizing of the neighboring base station search window.

10 Detailed Description of the Invention

Figure 4 is a representative diagram illustrating the transition from the inactive state to the active state at the assigned slot of a remote unit in a slotted mode communication system. An upper portion 41 represents a continual sequence of slots which flow in time from left to right. The lower portion 42 represents events occurring during a transition between active and inactive states of a remote unit in a slotted mode communication system in which slot 5 is an assigned slot. The time scale for the lower portion has been expanded so that the transition can be shown in more detail.

In particular, the lower portion 43 of Figure 4 shows the transition from an inactive state 40 to an active state 42. In the active state 42, the remote unit monitors the base station signal during at least a portion of slot 5. Prior to the start of slot 5, the remote unit transits from the inactive state 40 to the active state 42 through a transition state 44. As described above, in the inactive state 40, selected circuitry in the remote unit is unpowered, reducing power consumption and extending battery life of the remote unit. For example, power may be removed from the search engine during the inactive state 40.

During the transition state 44, power is reapplied to the selected circuitry of the remote unit. For example, if the search engine is unpowered, power is reapplied in the transition state 44. The duration of the transition state 44 is sufficient to allow the remote unit to power on circuits and initialize functions so that the remote unit is functional, allowing it to perform searches at the end of the transition state 44.

Following the transition state 44, the remote unit enters the active state 42. The active state 42 is made up of two parts: a preparation period 46 and an assigned slot period 48. During the preparation period 46, an initial search is performed reacquiring the pilot signal of the preferred base station so that the remote unit is prepared to monitor the paging channel during the assigned slot period 48. The assigned slot period 48 begins at the beginning of slot 5.

During the assigned slot period 48, the remote unit receives messages on the paging channel from the preferred base station. Nominally, at the completion of slot 5, the assigned slot period 48 and the active state 42 terminate and the remote unit enters the inactive state 40. In order to further reduce the power consumption of the remote unit, the base station may command the remote unit to enter the inactive state 40 before the completion of slot 5. Alternatively, if the base station cannot complete the transfer of messages during slot 5, the base station may command the remote unit to remain in the assigned slot period 48 after the completion of the slot. 5. Subsequently, the base station commands the remote unit to enter the inactive state 40. Searching terminates upon entering the inactive state 40 and power can then be removed from the search engine.

Figure 5 is a block diagram showing a portion of a remote unit 50. A receiver 51 receives wireless link signals. The receiver 51 provides for reception and down-conversion of the wireless link signal and also provides despreading in a CDMA environment, as well as other demodulation functions. The receiver 51 provides a series of digital values at its output.

According to well-known wireless link protocols, such as IS-95, before data is transmitted over the wireless link, it is divided into a series of blocks. The blocks are reordered in time such that the block order is non-time sequential as transmitted over the wireless link. This method of transmitting blocks is referred to as interleaving, and the process of reordering the blocks is referred to as deinterleaving. A deinterleaver 52 performs the deinterleaving function. The deinterleaver 52 receives samples from the receiver 51 and accumulates a series of blocks data. When an entire set of blocks has been received, the deinterleaver 52 reorders the blocks in time-sequential order and outputs them to a decoder 53.

**CLAIMS**

1. A method of selecting a set of PN offsets used by a remote unit in a communication system where the remote unit monitors a plurality of base stations and said plurality of base stations transmit signals fixed in PN offset relative to each other, the method comprising:
- 5 determining a delay between the transmission of a signal from a selected base station and the reception of said signal by a remote unit; and
- selecting a set of PN offsets used to search for signals transmitted by other non-selected base stations according to said delay.
- 10 2. The method of Claim 1 wherein determining said delay comprises:
- measuring a strength of said signal from said selected base station;
- and
- estimating said delay according to said measured signal strength.
3. The method of Claim 1 wherein determining said delay comprises:
- 15 determining a distance between said selected base station and said remote unit; and
- estimating said delay according to said measured distance.
4. The method of Claim 1 wherein selecting said set of PN offsets used to search for signals transmitted by other non-selected base stations comprises:
- 20 decreasing the size of said set of PN offsets if said delay decreases;
- and
- increasing the size of said set of PN offsets if said delay increases.
5. The method of claim 1 wherein selecting said set of PN offsets used to search for signals transmitted by other non-selected base stations comprises:
- 25 receiving a default set of PN offsets from said selected base stations;
- and
- searching said plurality of base stations wherein a subset of searches are performed with said default set of PN offsets and the remaining searches are performed with said selected set of PN offsets.
- 30 6. A method of adjusting the search window size used by a remote unit to in a communication system where the remote unit monitors a plurality of base

stations and said plurality of base stations transmit signals fixed in time relative to each other, the method comprising:

determining a delay between the transmission of a signal from a selected base station and the reception of said signal by a remote unit; and

5 selecting a size of a search window to be used by said remote unit to search for signals transmitted by other non-selected base stations according to said delay.

10 7. The method of Claim 6 wherein determining the delay comprises: measuring said signal strength of said selected base station; and estimating said delay according to said measured signal strength.

8. The method of Claim 6 wherein determining said delay comprises: determining a distance between said selected base station and said remote unit; and

15 9. The method of Claim 6 wherein selecting a size of a search window used to search for signals transmitted by other non-selected base stations comprises: decreasing the size of said search window if said delay decreases; and increasing the size of said search window if said delay increases.

20 10. The method of Claim 6 wherein said search window size is selected to limit the search window size earlier in time from predicted arrival times of said non-selected base stations.

11. The method of Claim 6 wherein said signal is a pilot signal.

12. The method of Claim 6 wherein said selected base station is a preferred base station.

25 13. The method of Claim 6 wherein said non-selected base stations are neighboring base stations.

30 14. A method of selecting a search window size used by a remote unit in a slotted mode wireless communication system with a plurality of base stations configured to transmit a PN encoded signal at a time offset different than neighboring base stations, and at least one remote unit configured to receive said PN encoded signals transmitted by said base stations, the method comprising:



measuring a strength of said PN encoded signal transmitted by a preferred base station;

selecting a search window in response to said strength of said PN encoded signal; and

5                    searching said search window for a PN encoded signal transmitted by a neighboring base station.

15                  15.    The method of Claim 14 wherein said search window size is selected to adjust the search window size earlier in time from a predicted arrival time of the neighboring base station.

10                  16.    The method of Claim 14 wherein if said strength of said PN encoded signal transmitted by said preferred base station is below a threshold a first search window size is selected, and if said strength of said PN encoded signal transmitted by a preferred base station is equal to or exceeds said threshold, a second search window size is selected.

15                  17.    The method of Claim 14 wherein there is a plurality of thresholds and said search window size is changed each time said strength of said PN encoded signal transmitted by said preferred base station crosses a threshold.

18.    The method of Claim 14 wherein the selected size search window is used to search a plurality of neighboring base stations.

20                  19.    A remote unit in a slotted mode wireless communication system with a plurality of base stations configured to transmit a PN encoded signal at a time offset different than neighboring base stations, and at least one remote unit configured to receive said PN encoded signals transmitted by said base stations comprising:

25                        means for measuring a strength of said PN encoded signal transmitted by a preferred base station;

                      means for selecting a search window in response to said strength of said PN encoded signal; and

30                        means for searching said search window for a PN encoded signal transmitted by a neighboring base station.

20.    The method of Claim 19 wherein if said strength of said PN encoded signal transmitted by said preferred base station is below a threshold a first search

window size is selected, and if said strength of said PN encoded signal transmitted by a preferred base station is equal to or exceeds said threshold, a second search window size is selected.

5        21.    The method of Claim 19 wherein there is a plurality of thresholds and said search window size is changed each time said strength of said PN encoded signal transmitted by said preferred base station crosses a threshold.

      22.    The remote unit of Claim 19 wherein the selected size search window is used to search a plurality of neighboring base stations.

10       23.    The remote unit of Claim 19 wherein said set of PN offsets is selected to be twenty chips earlier in time from the reference time to sixty chips later in time than the reference time.

      24.    A remote unit for use in a wireless communication system comprising:

15         a search engine configured to determine a signal strength of a received signals and perform searches for signal transmitted by base stations; and  
          a controller in communication with said search engine configured to  
          pass selected search parameters to the search engine,  
          receive search results,  
          evaluate said determined signal strength of said received  
20       signal,

          select a set of PN offsets to be searched for signals transmitted by base stations.

25       25.    The remote unit of Claim 24 wherein said controller is further configured such that said set of PN offsets is selected in response to said determined signal strength.

30       26.    The remote unit of Claim 24 wherein said controller is further configured such that if said determined signal strength is below a threshold level a first size of said set of said PN offsets is selected, and if said determined signal strength is equal to or exceeds said threshold level a second size of said set of PN offsets is selected.

      27.    The remote unit of Claim 24 wherein said controller is further configured such that there are a plurality of thresholds and a size of said set of PN

offsets is changed each time said determined signal strength crosses one of said threshold levels.

28. The remote unit of Claim 24 further comprising:

5 a default set of PN offsets communicated to said remote unit by a preferred base station;

wherein said controller passes said default set of PN offsets for some searches for signals transmitted by a base station and said set of PN offsets selected as responses to said determined signal strength for other searches for signals transmitted by a base station.

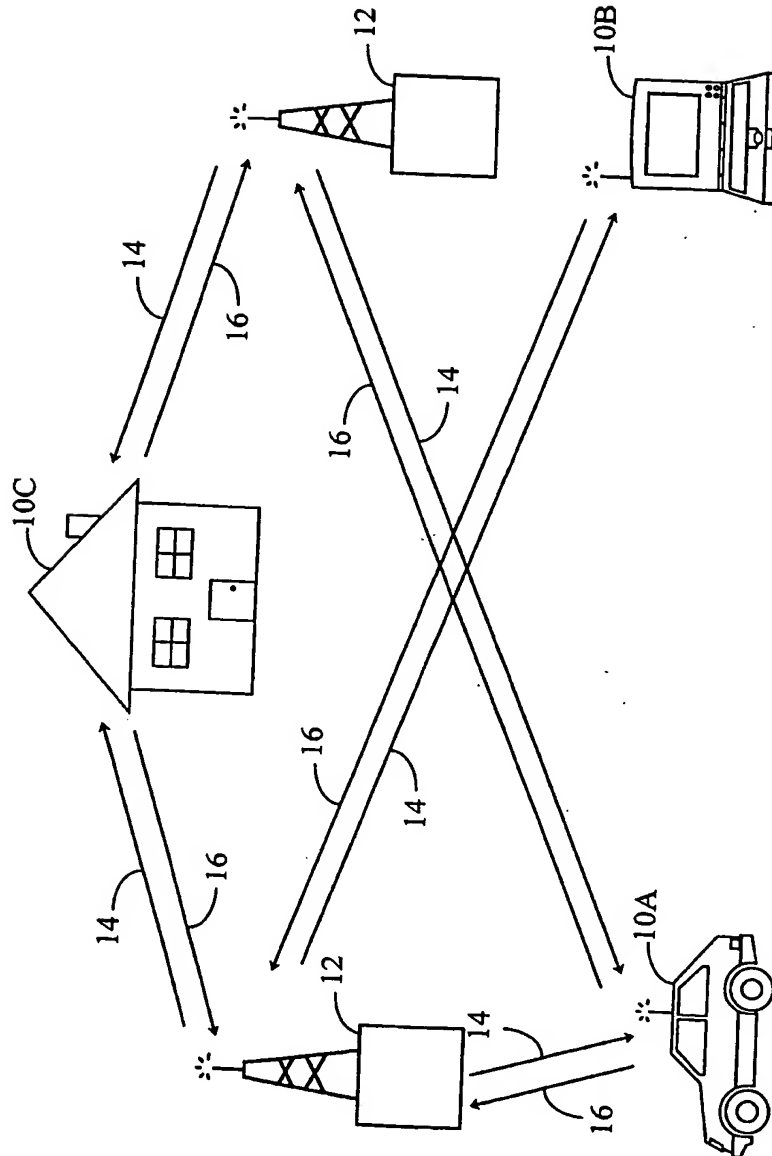


FIG. 1  
PRIOR ART

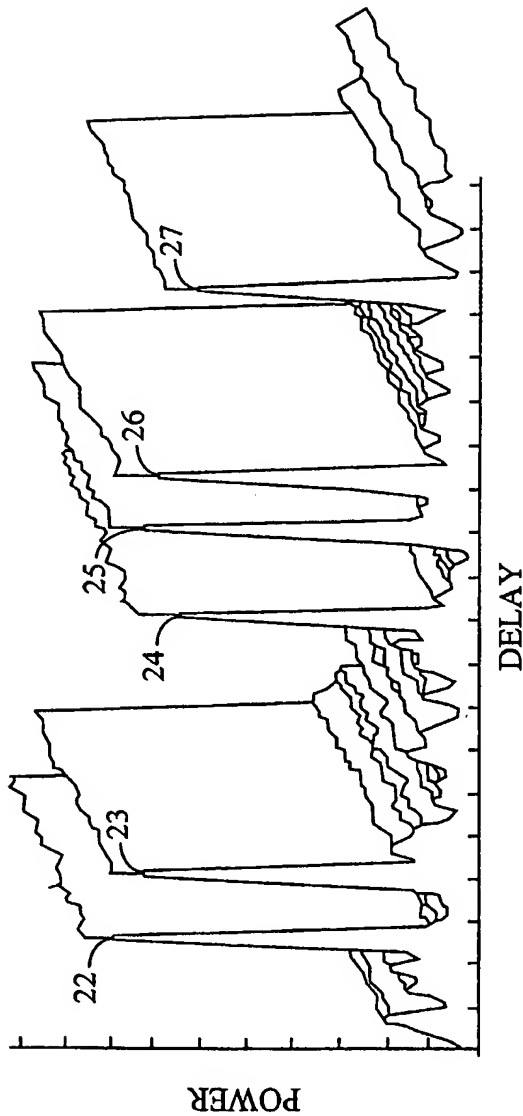


FIG. 2

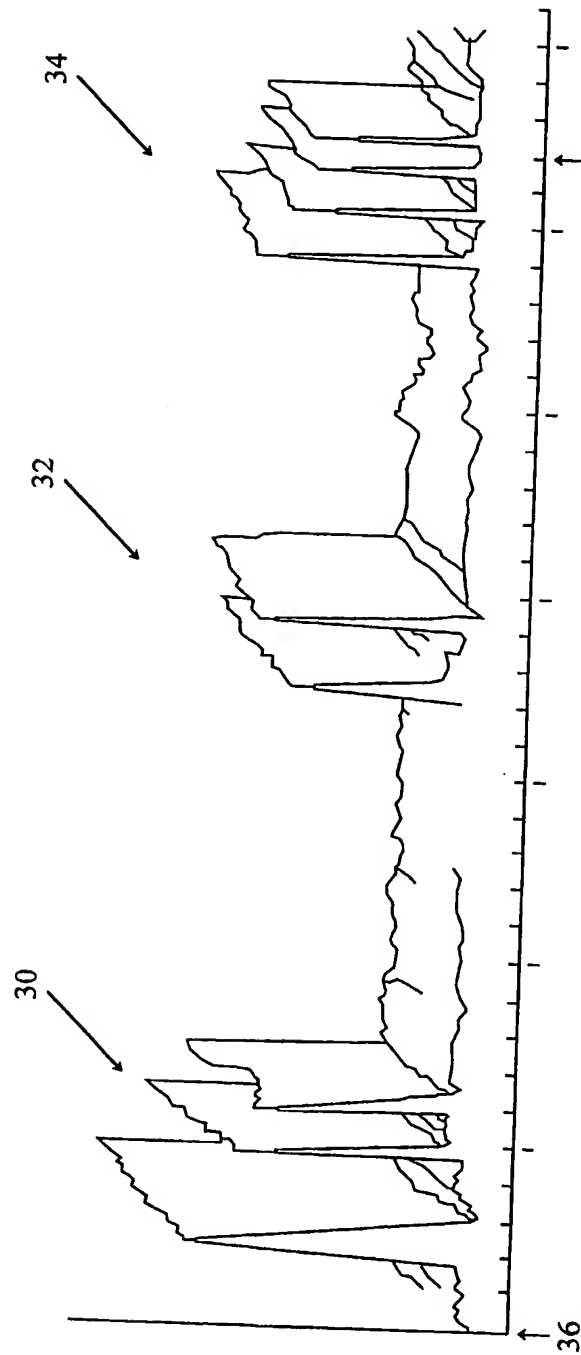


FIG. 3

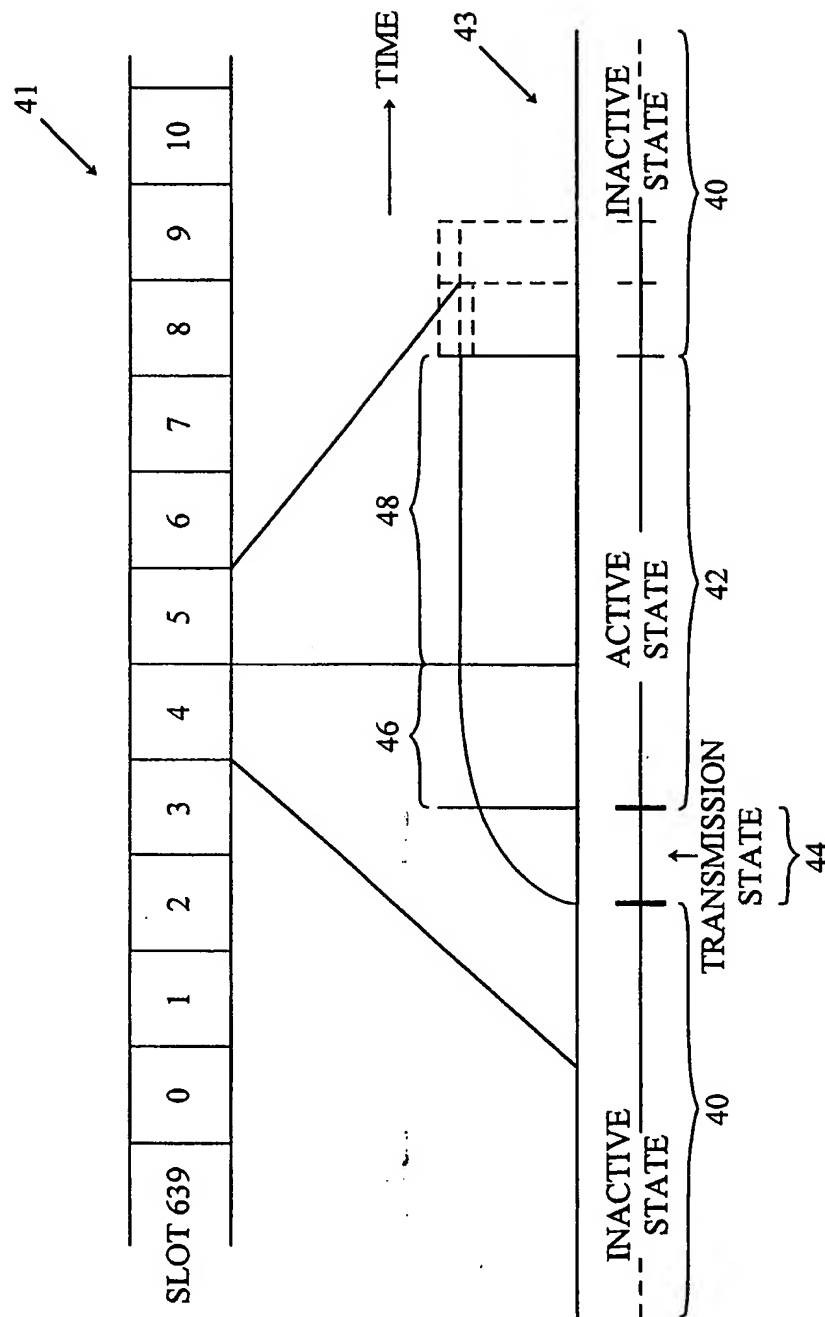


FIG. 4

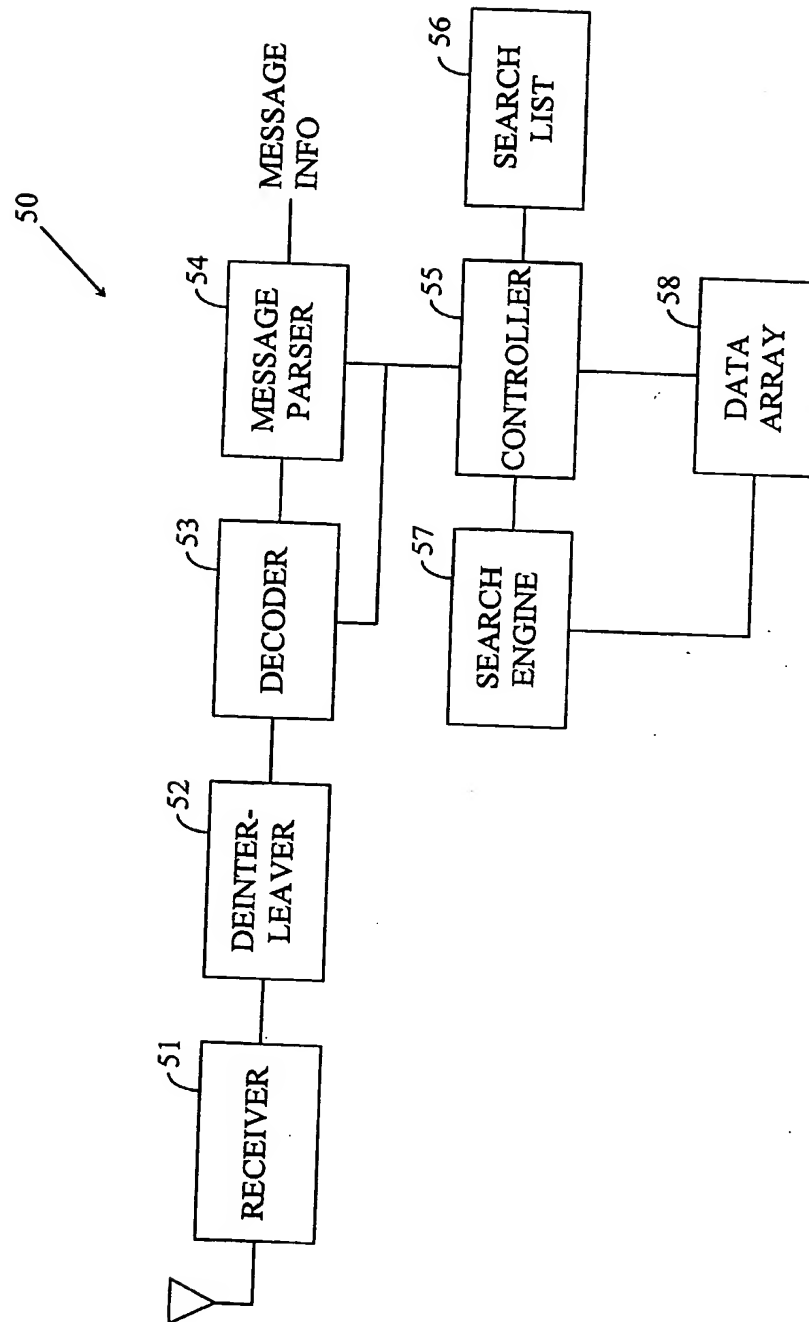


FIG. 5



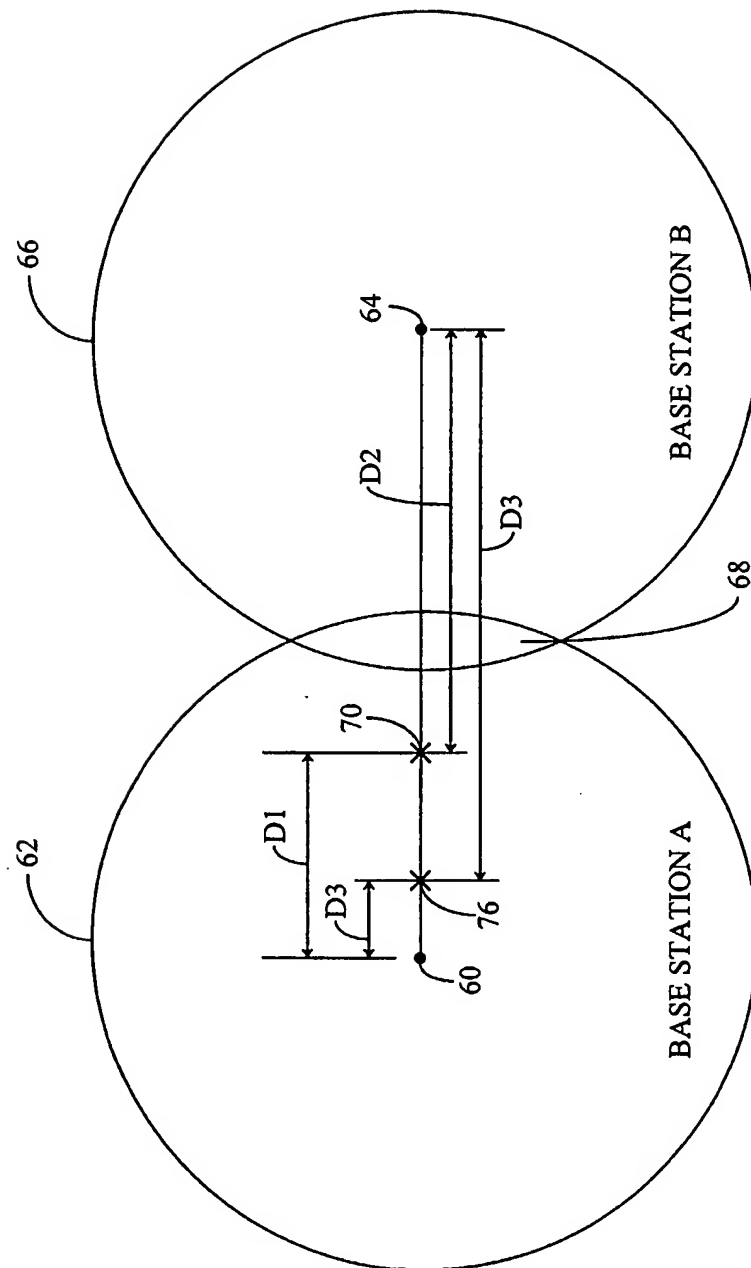


FIG. 6

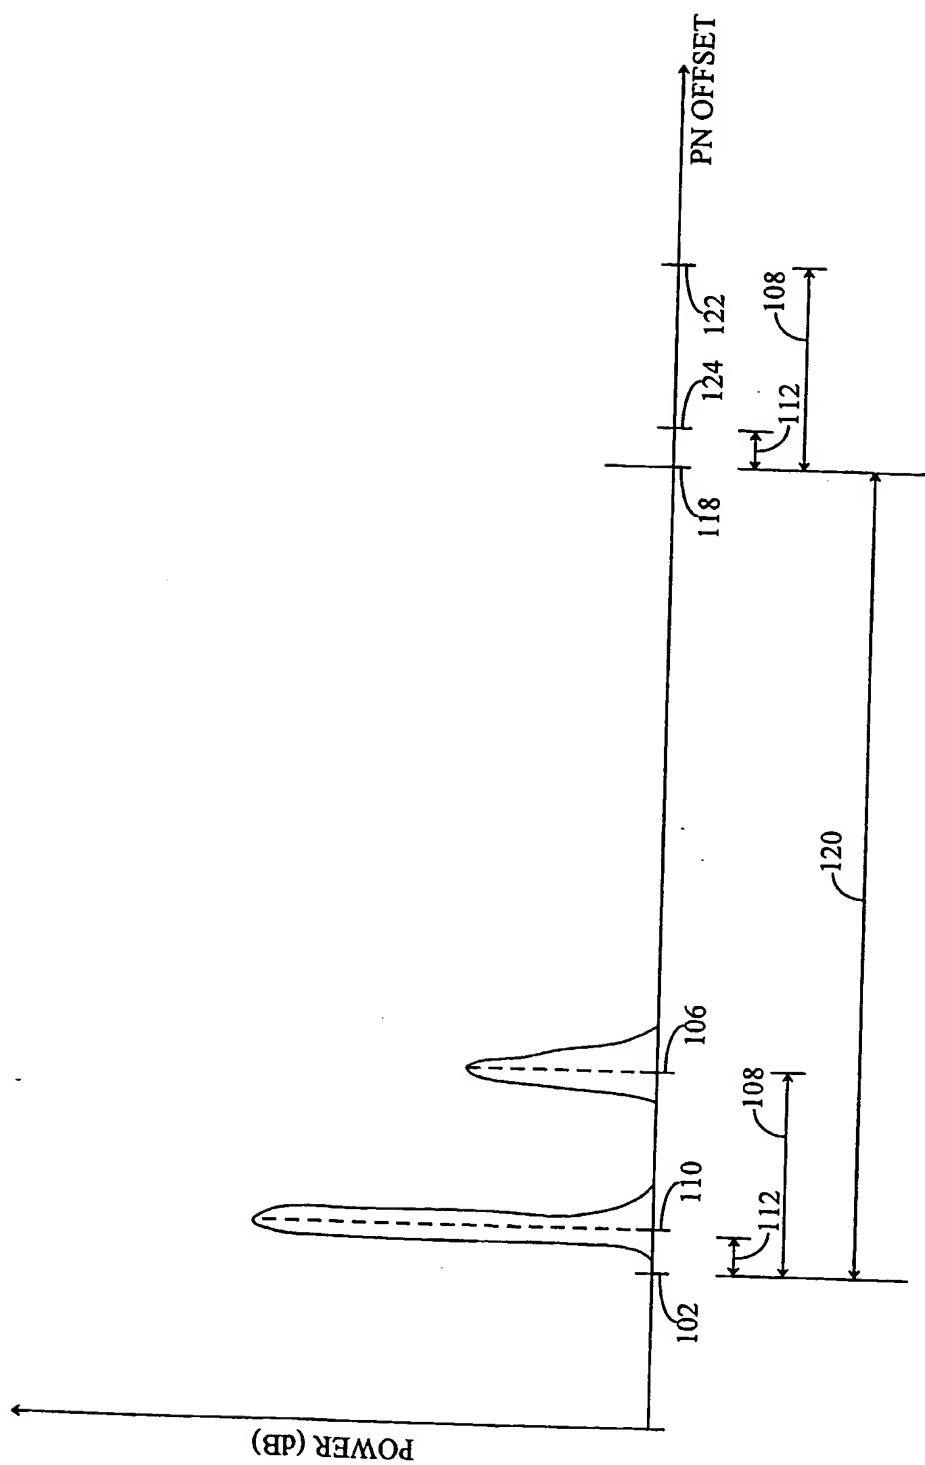


FIG. 7

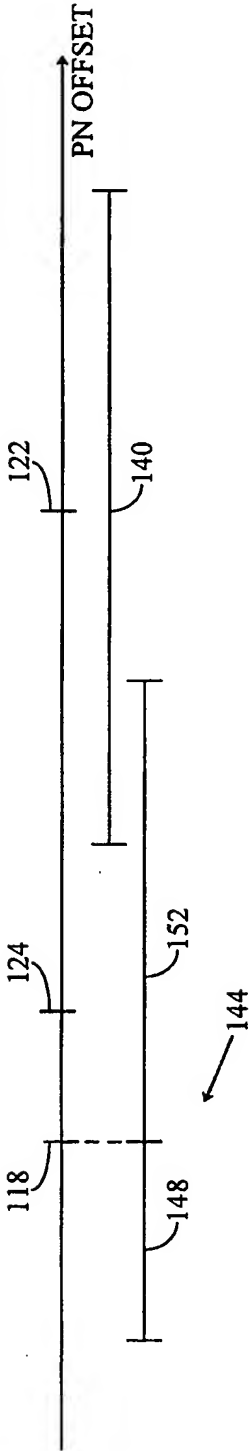


FIG. 7A

9/9

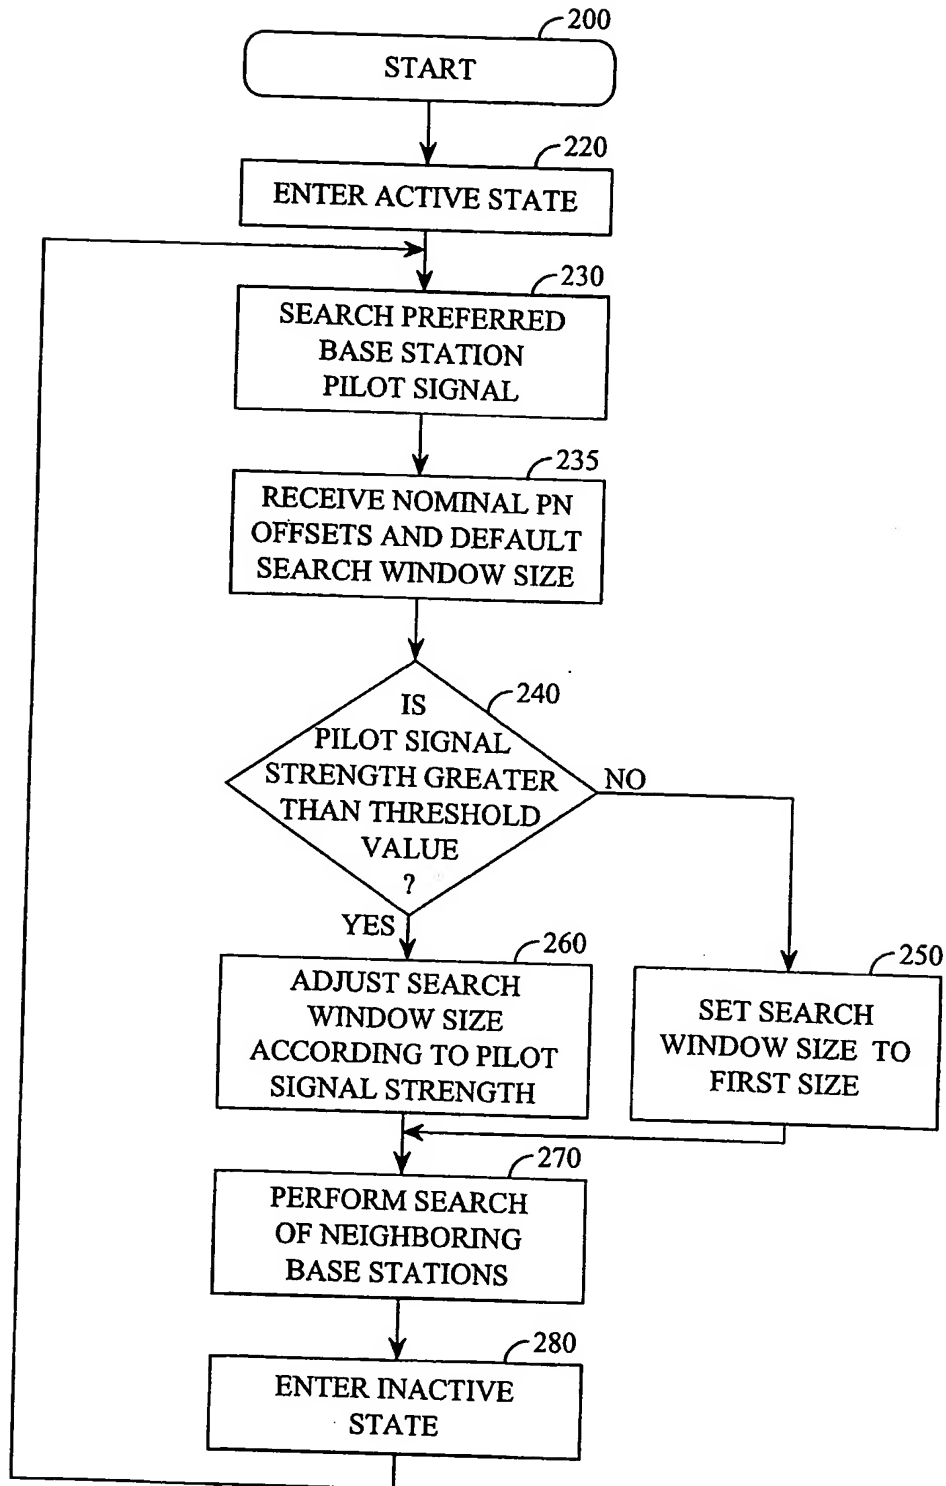


FIG. 8